



32 GB & 8 channels

Support for high-capacity memory cards up to **32 GB**

Inter-unit synchronization: max. **8** channels




4 channel Data Recorder DA-21

The 4 channel Data Recorder DA-21 is capable of recording acoustic / vibration waveforms and various electrical signals in the field.

Recorded data are saved in WAVE format on SD cards and can be imported into a computer for waveform analysis and other processing tasks.

4 channel Data Recorder DA-21 CE

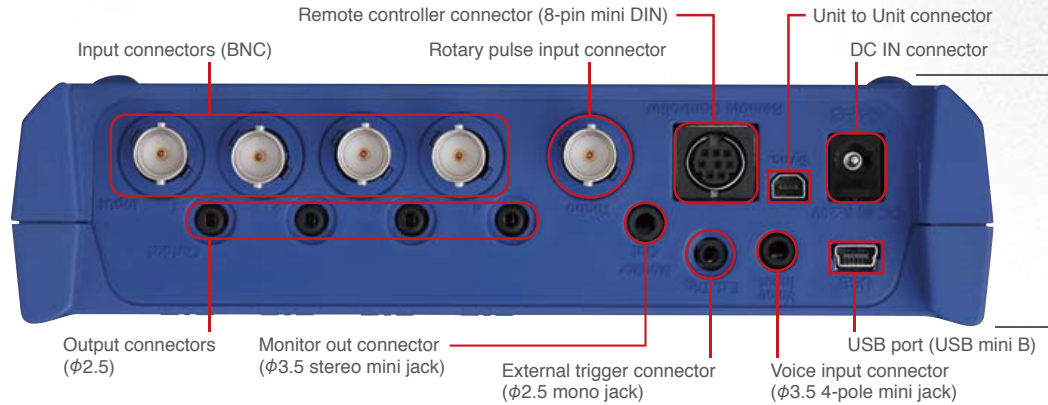


Playback of recorded data supported


Silent operation without any moving parts. Able to operate also in difficult environments subject to vibration and humidity.

Voice memo recording function

Bar graph provides visual level indication



Measurement screen




Menu screen



Software DA-21 data can be displayed and analyzed in various software packages

Viewer Software

AS-70 Viewer Supplied

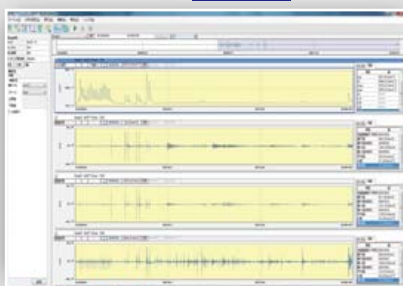

4 channel display screen example


Reads WAVE format files produced by the DA-21 and enables functions such as waveform display, level display, file output (WAVE format/CSV format), and playback. Display of inter-unit synchronization data is also supported.

Specifications

Graph	Display types	Amplitude waveform, level waveform
Frequency weighting characteristics	Z, A, C, G, C to A, vertical vibration characteristics, horizontal vibration characteristics	
Time weighting characteristics	10 ms, F (Fast), 630 ms, S (Slow), 10 s	
Statistical processing	Amplitude waveform	Maximum value, minimum value, average value, variance, effective value
	Level waveform	L_{eq} / L_{E1} / L_{max} / L_{min} / L_N (5 types)

Waveform Analysis Software

AS-70 Option

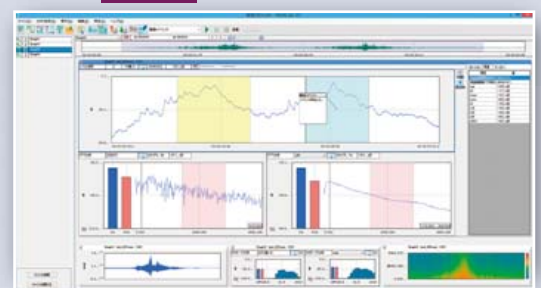

Waveform analysis screen example

Adds octave band analysis and FFT analysis

Specification: Waveform analysis

Frequency weighting characteristics: FFT analysis

Time weighting characteristics: Octave band analysis


Operating environment requirements

Viewer software AS-70 Viewer / Waveform Analysis Software AS-70 CPU : Intel Core i5 2 GHz or faster RAM : 2 GB or more, 4 GB recommended HDD : 20 GB or more
Waveform analysis software CAT-WAVE CPU : Intel Core i5/i7 1.4 GHz or more (Core2 Duo 2 GHz or more) RAM : 2 GB or more HDD : 60 GB or more (free space)

Improvements compared to predecessor model DA-20




Support for high-capacity SD cards (max. 32 GB)




Quantization 24 bit also supported




Battery Life
Using four IEC R6 (size AA) alkaline batteries
Approx. 8 hours*1
*1 20 kHz, 4ch, CCLED OFF
Using Battery Pack BP-21A with four IEC R20 (size D) alkaline batteries
Approx. 30 hours*2
*2 Depending on recording settings




Use as USB storage supported (recognized as removable disk)




Additional rotary signal input (dedicated connector)



Inter-unit synchronization (max. 8 channels)






Separate input and playback output connectors



Time trigger function added

System Configuration

(Other equipment is optional)

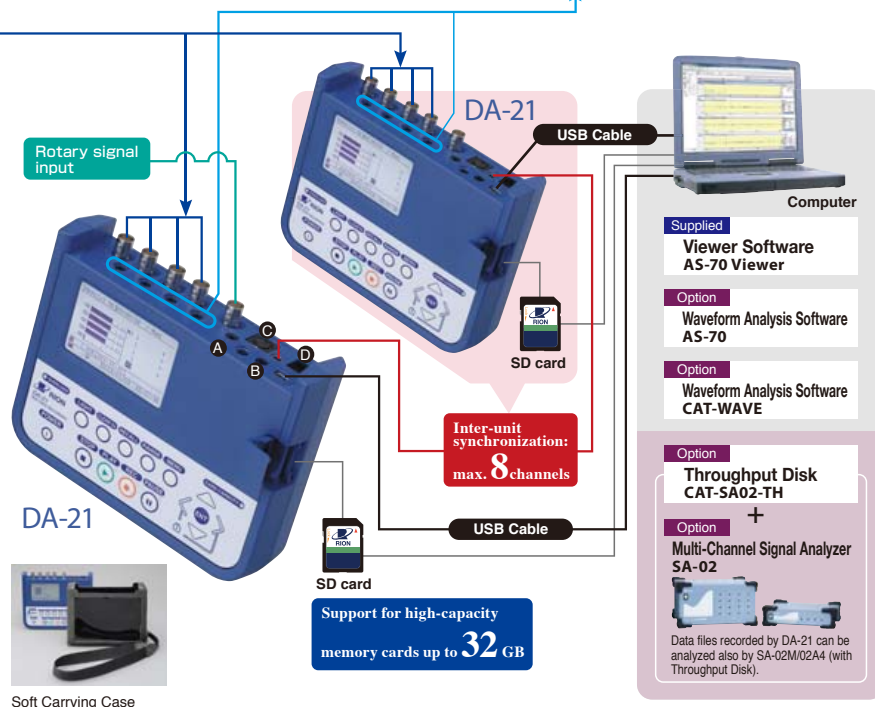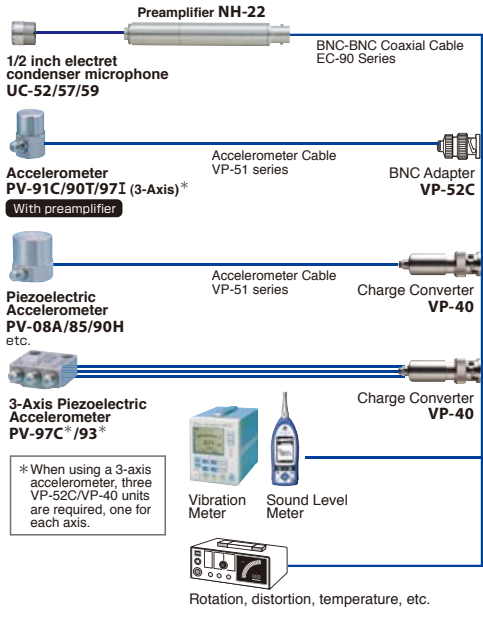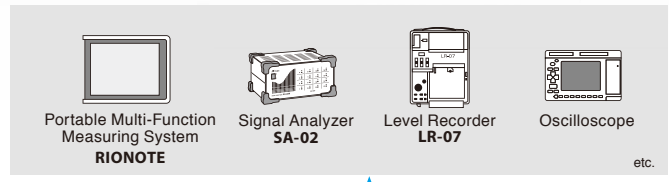


ve band, 1/3 octave band, analysis functions to AS-70Viewer

Processing functions	Maximum value, minimum value, average value, effective value, distribution, differentiation and integration, HPF, LPF
Weighting	Z, A, C, G, C to A, vertical vibration characteristics, horizontal vibration characteristics
Number of analysis points	32 to 65 536 points
Data view	Power spectrum, power spectrum density, spectrogram
Characteristics	10 ms, F (Fast), 630 ms, S (Slow), 10 s
Applicable standards	JIS C 1514 (IEC 61260) Class 1
Analysis frequencies	octave bands 0.5 Hz to 16 kHz, 1/3 octave bands 0.4 Hz to 20 kHz

Waveform Analysis Software CAT-WAVE (Option)

This software is a product of Catec Inc.

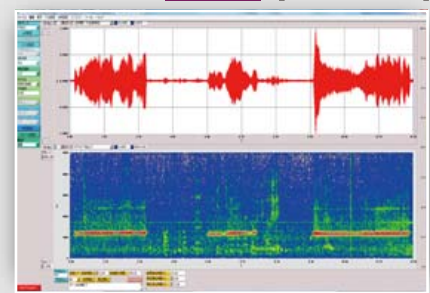

Reads WAVE format files produced by the DA-21 and enables functions such as octave band analysis, 1/3 octave band analysis, and FFT analysis. Inter-channel processing functions such as cross spectrum and transfer function, as well as 1/12 octave band analysis are also possible. (Tracking analysis can be added as an option.)

Specifications

Waveform	Display	Scaled time axis, Differential and integral calculus available	
FFT analysis	Sampling points	64 to 32 768 points	
	Display function	Power spectrum, Cross spectrum, Transfer function, Coherence, Power spectrum map, Differential and integral calculus for spectrum area	
Octave band analysis	Applicable standard	JIS C 1514 (IEC 61260) Class 1	
	Frequency range	Octave band	0.5 Hz to 8 kHz (15 bands),
		1/3 octave band	0.4 Hz to 10 kHz (45 bands),
1/12 octave band	0.36 Hz to 11 kHz (180 bands)		
Time weighting characteristics		1 ms, 10 ms, 35 ms, F (Fast), 630 ms, S (Slow), 10 s	
Frequency weighting characteristics		FLAT, A, C	

ore (free space), 100 GB or more recommended ■ DISPLAY : XGA (1024x768) or higher ■ OS : Microsoft Windows 7 Professional 32 bit/64 bit, 8.1 Pro 32 bit/64 bit, 10 Pro 32 bit/64 bit
e) ■ DISPLAY : SXGA (1280x1024) or higher ■ OS : Microsoft Windows 7 Professional 32 bit / 64 bit, 8.1 Pro 64 bit

Input Section	Input connectors	
	Signal input	4 channels (BNC)
	Rotation speed (rotary pulse)	1 channel (BNC)
	Voice memo input	1 channel (voice memo microphone 3.5 mm. 4-pole mini jack)
	External trigger input	1 (φ2.5 mm. stereo mini jack)
	Remote control	For optional remote controller, 8-pin mini DIN
	USB port	Mini B
	Input range	±0.01 V, 0.03 V, 0.1 V, 0.3 V, 1 V, 3 V, 10 V
	Input impedance	100 kΩ or more
	Max. input voltage	±13 V
	Overload	+2.0 dB ±1.0 dB at range full-scale
	Input coupling	AC/DC (AC coupling (primary) -3.0 dB ±1.0 dB at 0.315 Hz)
	CCLD (Constant Current Line Drive)	2 mA, 24 V
	Filters (digital)	High-pass OFF, 5 Hz (-3 dB ±1.0 dB) (-12 dB / oct) / Low-pass OFF, 200 Hz, 1 kHz, 2 kHz (-3 dB ±1.0 dB) (-12 dB / oct)
	Frequency response	
	DC coupling	DC to 1 Hz: ±1.0 dB 1 Hz to 12.5 kHz: ±0.5 dB 12.5 kHz to 20 kHz: ±1.0 dB
	AC coupling	1 Hz: ±1.0 dB 1 Hz to 12.5 kHz: ±0.5 dB 12.5 kHz to 20 kHz: ±1.0 dB
	Inter-channel phase difference	Max. 1 deg. (with AC coupling, HPF OFF, same frequency range, 20 kHz range)
S/N ratio	80 dB or more (input voltage range: 10, 3, 1, 0.3 V; within frequency band; including overload)	
Distortion	Max. 0.1 % (within frequency band)	
Voice memo function		
2 operation modes A: Recording in stand by state B: Revolution speed channel is always used as voice memo during recording Revolution speed function is disabled while using voice memo function *Marker function becomes also active during recording		
Rotary pulse		
Input impedance 100 kΩ or more		
Input voltage range	0 to 10 V, open collector	
Threshold level	Approx. 2.5 V	
Counting method	Periodic measurement	
Revolution measurement range	200 to 600 000 rpm (1 pulse / rotation)	
Output Section	Output Connectors	
	Playback output	
	4 (φ2.5, separate from signal input), for playback of recorded signal, output impedance 600 Ω	
	Frequency response	
	DC to 1 Hz: ±1.0 dB, 1 Hz to 12.5 kHz: ±0.5 dB, 12.5 kHz to 20 kHz: ±1.0 dB	
	Output voltage	
	±3.16 V at range full-scale	
	Max. output voltage	
	±4.0 V	
	Inter-channel phase difference	
Max. 1 deg. (within frequency range)		
Monitor output		
1 channel (φ3.5 stereo mini jack), Output impedance 100 Ω		
During recording		
Analog signal for 1 selected channel		
During playback		
Playback output of any selected channel (including voice memo)		
Output voltage		
±3.16 V at range full-scale		
Max. output voltage		
±5.5 V		
Playback output selection		
Output from playback output and monitor output		
Recorder Section	Recording media	
	SD card (Use only RION supplied cards for assured operation.) Max. capacity 32 GB File system (FAT16/FAT32)	
	AD converter	
	Quantization: 24 bit, Bit length 16 bit/24 bit selectable from menu	
	File format	
	WAVE (16 bit/24 bit, linear, non-compressed)	
	Frequency range	
	100 Hz, 500 Hz, 1 kHz, 5 kHz, 10 kHz, 20 kHz	
Sampling frequency		
Frequency range x 2.4 / 2.56		
Max. recording time		
Approx. 23 hours (20 kHz, sampling frequency x2.4, 4 channels, 32 GB card)		
Pre-recording		
Data captured since 0 s, 1 s, or 5 s before recording key was pressed, or triggered		

Trigger Section	Trigger source	
	External: Open-collector trigger External, External Gate (Comparator output of Sound Level Meter NL-62, NL-52, NL-42 supported)	
	Internal: Level trigger (Waveform) 0.1 % to 0.9 %, 1 % to 99 % of range full-scale, linear peak Time trigger: Repeated recording at preset intervals between specified start time and end time possible	
Trigger mode		Free, single, repeat (file division for repeat)
Pre-trigger		0 s, 1 s, 5 s (prior to trigger time)
Calibration	Conversion	
	Linear (EU), Log (dB) Selectable for each channel	
Display Section	LCD	
	256 x 160 dots (Monochromatic LCD, with backlight)	
	Display items	
Setting screen, recording screen, level bars, level history		
LEDs		Overload indication, SD card low space warning, status indication (record, playback, trigger standby, etc.)
Saving settings		Five sets of settings can be saved in internal memory, startup files on SD card
USB	Mass storage class	Recognized as removable disk
Power Supply Section	Power requirements	
	Batteries or dedicated AC adapter (NC-98C), cigarette lighter adapter (CC-82)	
	Batteries	
	Four IEC R6 (size AA) batteries (alkaline or nickel-hydrate rechargeable batteries)	
	External DC	
5 to 20 V, current consumption 190 mA (6 V) (Frequency range 100 Hz, CCLD OFF, backlight OFF, monitor output OFF)		
Battery life (using alkaline batteries in cont. operation at 23 °C, back light off, typical value for 32 GB card)	Alkaline batteries	20 kHz, 4 channels, CCLD ON: approx. 4.5 hours CCLD OFF: approx. 8 hours CCLD OFF: approx. 10 hours
	Nickel-hydrate batteries	20 kHz, 4 channels, CCLD ON: approx. 7 hours CCLD OFF: approx. 10 hours
	20 kHz, 1 channel, CCLD ON: approx. 11 hours CCLD OFF: approx. 12 hours	
	20 kHz, 1 channel, CCLD ON: approx. 11 hours CCLD OFF: approx. 12 hours	
Inter-unit synchronization function		Synchronized operation of two units allows simultaneous waveform level recording in up to 8 channels
Dimensions and Weight		Approx. 140 (H) x 175 (W) x 45 (D) mm, approx. 450 g (excl. batteries)
Ambient conditions for operation		-10 °C to +50 °C, 10 % to 90 % RH (no condensation)
Supplied Accessories		IEC R6 (size AA) alkaline battery x 4, AS-70Viewer x 1

Option

Product	Designation
Waveform analysis software	AS-70
Waveform analysis software	CAT-WAVE
Charge Converter	VP-40
Memory card*1	2 GB MC-20SD2
(SD card)	32 GB MC-32SD3
AC adapter	NC-98C
Battery pack	BP-21A
Cigarette lighter adapter	CC-82
4-channel data recorder remote controller	DA-20RC1
Voice memo microphone	MH-34B4B
Monitor earphone	ATH-C320
Soft Carrying Case (with shoulder strap)	DA-20007
BNC-BNC coaxial cable	EC-90 series (2 m and up)
BNC-BNC cable	NC-39A
BNC-mini plug Cable	CC-24
Comparator output cable (for NL-42/52)*2	CC-42C
Inter-unit sync cable	CC-43
USB A-Mini B Cable	-

*1 Use only RION supplied cards for assured operation.

*2 When used with the DA-21, BNC-mini plug Cable CC-24 and Joint connector VP-54C are required.

Maximum recording times on memory card (SD card) [Approximate]

32 GB SD card Sampling frequency: x2.56 (2.4 also supported), Quantization: 16 bit

Number of channels	Frequency range (Hz)					
	100 Hz	500 Hz	1 kHz	5 kHz	10 kHz	20 kHz
1	17066 h 40 m	3413 h 20 m	1706 h 40 m	341 h 20 m	170 h 40 m	85 h 20 m
2	8533 h 20 m	1706 h 40 m	853 h 20 m	170 h 40 m	85 h 20 m	42 h 40 m
3	5688 h 32 m	1137 h 36 m	568 h 48 m	113 h 36 m	56 h 48 m	28 h 24 m
4	4266 h 40 m	853 h 20 m	426 h 40 m	85 h 20 m	42 h 40 m	21 h 20 m

*Varies slightly depending on number of data files *Maximum recording time for one file is approx. 1000 hours. *Use only RION supplied cards for assured operation.

2 GB SD card Sampling frequency: x2.56 (2.4 also supported), Quantization: 16 bit

Number of channels	Frequency range (Hz)					
	100 Hz	500 Hz	1 kHz	5 kHz	10 kHz	20 kHz
1	1066 h 40 m	213 h 20 m	106 h 40 m	21 h 20 m	10 h 40 m	5 h 20 m
2	533 h 20 m	106 h 40 m	53 h 20 m	10 h 40 m	5 h 20 m	2 h 40 m
3	355 h 32 m	71 h 06 m	35 h 33 m	7 h 06 m	3 h 33 m	1 h 46 m
4	266 h 40 m	53 h 20 m	26 h 40 m	5 h 20 m	2 h 40 m	1 h 20 m



RION Co., Ltd. is recognized by the JCSS which uses ISO/IEC 17025 (JIS Q 17025) as an accreditation standard and bases its accreditation scheme on ISO/IEC 17011. JCSS is operated by the accreditation body (IA Japan) which is a signatory to the Asia Pacific Laboratory Accreditation Cooperation (APLAC) as well as the International Laboratory Accreditation Cooperation (ILAC). The Quality & Environmental Management system Center of RION Co., Ltd. is an international MRA compliant JCSS operator with the accreditation number JCSS 0197.



ISO 14001 RION CO., LTD.
ISO 9001 RION CO., LTD.

* Windows is a trademark of Microsoft Corporation. * Specifications subject to change without notice.

Distributed by:



3-20-41, Higashimotomachi, Kokubunji, Tokyo 185-8533, Japan
Tel: +81-42-359-7888 Fax: +81-42-359-7442

This product is environment-friendly. It does not include toxic chemicals on our policy.
This leaflet is printed with environmentally friendly UV ink.